



DORA-TL

AlchemieLighting


15-30W | 1600-3250 LUMENS | 90CRI | 2700-5000K

*Styish and Compact LED Luminaire that will enhance Architectural Applications.
Standard with 90CRI Rating and Integral Triac Dimmable Driver, Trimless Mounting.*


DETAILS

Dimming: Triac (5-100%), 0-10v
Input Voltage: 100-277v 50-60Hz
Finishes: White, Black, Silver
Beam Angle: 18,24,33,54 Degrees
Operating Temp Range:-20c through +45c
Warranty: 5 Years
Weight: 0.4lbs
Mounting: Perforated Plaster Flange
Reflector: 18, 24,33, 54 Degrees
Additional: Dora family also includes an adjustable zoom track light, surface, wall and pendant versions using the same optics.


DIMENSIONS

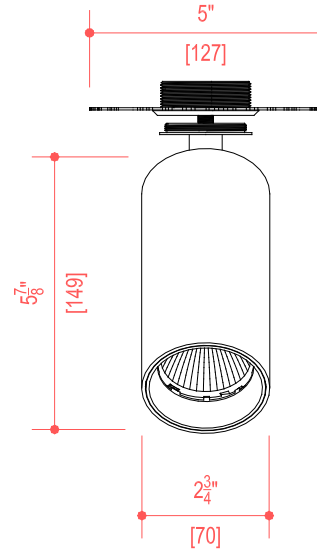

MOUNTING - ELECTRICAL BOX BY OTHERS

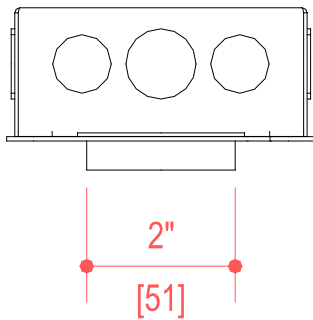

OPTIC ACCESSORIES- ORDER SEPERATELY



HEXCELL LOUVER



VARIOUS COLOR FILTERS AND CCT CORRECTION AVAILABLE. IN ADDITION TO SPREAD, SOLITE AND DIFFUSION MATERIALS

Ordering Information:

DORA-TL	WATTS : 15W 20W 30W
	TEMP : 2700K 3000K 3500K 4000K 5000K
	BEAM : 18 24 33 54
	BODY FINISH : WH BK SL
	BEZEL FINISH : WH BK SL

15w-1600lm | 20w-2280lm | 30w-3250lm (Based on 3000k)

