

ELLA-Mini Round Trimless

9-13W | 749-1005 LUMENS | 93CRI | 2700-4000K 3.5" DIAMETER

Recessed LED Single Accent Light for various applications. Modular design with interchangeable reflectors, trims and lenses. Universal Dimming and Open plenum

DETAILS

Dimming: Triac (5-100%), 0-10v Universal
 Input Voltage: 100-277v 50-60Hz
 Finishes: White, Black, Silver, Chrome
 Beam Angle: 15,24,38/55 Degrees
 Operating Temp Range:-20c through +45c
 Warranty: 5 Years
 Weight: 3.8lbs
 Optics: Cree COB with Acrylic TIR Reflectors
 Additional: IC Rated Housing Standard.
 Custom RAL finishes upon request.
 Available in overlap trim version.
 Remodeler options available for both trimless and trimmed units.

OPTIC ACCESSORIES

HEX - Hexcell Louver
 SOL - Solite Lens
 Various color filters and CCK filters available upon Request

Housing Ordering:


ELLA-R-TLNC		WATTS : 9W 13W
ELLA-R-TLREM		WATTS : 9W 13W

Trim Ordering:

ELLA-R-TL		TEMP : 2700K 3000K 3500K 4000K
		BEAM : 15 24 33 55
		CONE FINISH : WH BK CH SL
		TRIM FINISH : WH BK CH SL RAL#XXXX
		ACCESSORIES: HEX SOL

9w-749lm | 13w-1005lm


ELLA MODULAR DESIGN

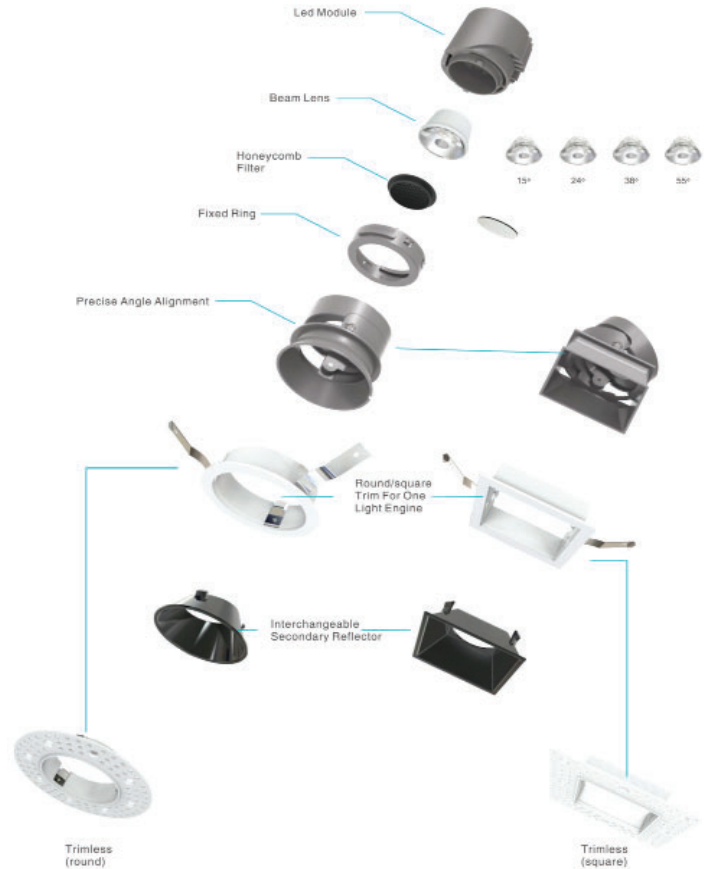

ELLA-Mini ound Tr



ESS Plastic case:
L 84 x W 40 x H 25 mm
(L 3.30 x W 1.57 x H 0.99 in)

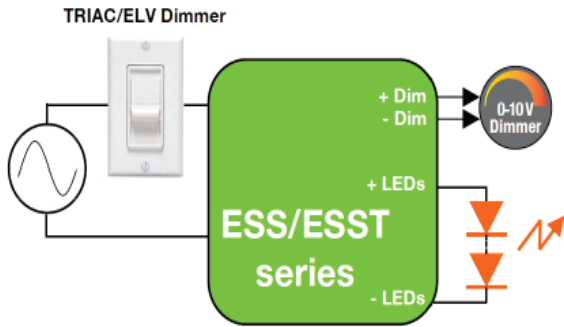

DRIVER DATA

Junction box with through wiring capability.

Drivers can be easily accessed from below the ceiling.

STANDARD DRIVER IS UNIVERSAL DIMMING

9w / 250ma | 13w/350ma





120/277V Input

Triac and ELV Dimming @ 120v Only

0-10v Dimming

ELLA-Mini Round Trimless

PERFORMANCE

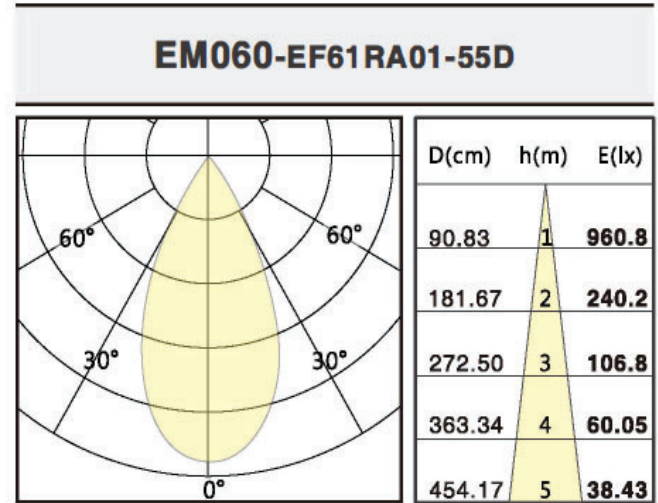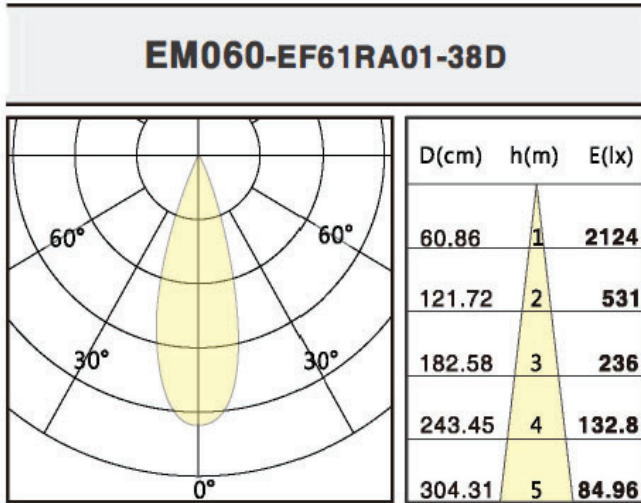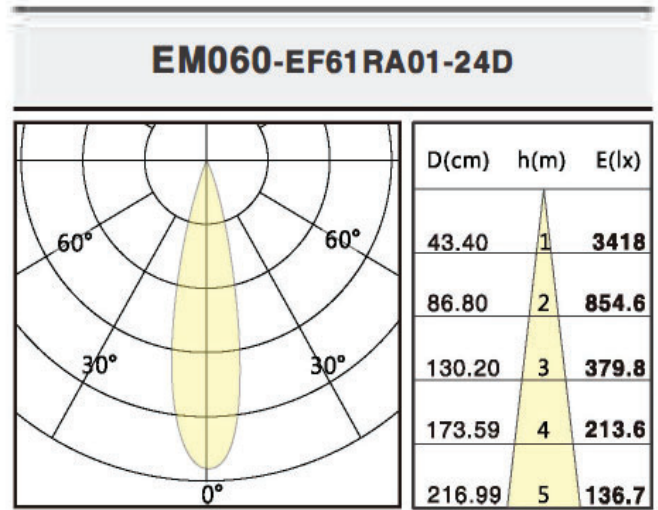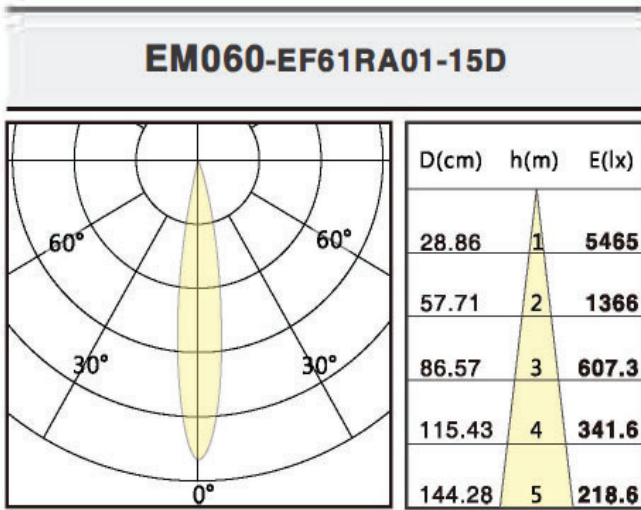

ABOVE DATA FOR 9W UNITS.
FOR 13W DATA MULTIPLY OUTPUTS BY 1.34