



# OVEGA-PD


10-30W | 900-3000 LUMENS | 90CRI | 2700-5000K

*Styish and Compact Pendant Luminaire that will enhance any Retail or Commercial Applications. Standard with 90CRI Rating and Integral Triac/0-10v Dimmable Driver.*

## DETAILS

Dimming: Triac (5-100%) and 0-10v  
 Input Voltage: 100-277v 50-60Hz  
 Finishes: White, Black, Silver  
 Beam Angle: 15, 24, 38, 60, Zoom (15-45)  
 Operating Temp Range: -20c through +45c  
 Warranty: 5 Years  
 Weight: 0.36lbs  
 Mounting: Surface or Recessed Junction box (by others). Available with fixed track mounting option.  
 Glare Control: 6 Optical Accessories available in all finishes to match the light. No tools required to install accessories or lenses.  
 Additional: Ovega family also includes track and surface mount options.

## DIMENSIONS

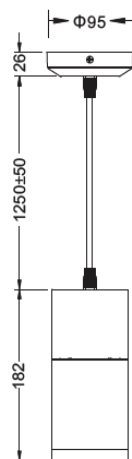


1250mm (50") Cord as standard.


Custom lengths available upon request.

Measurements in Millimeters. To Convert to Inches Divide by 25.4


## TRACK OPTIONS




"J" Style  
Contech|Juno



"L" Style  
Lightlior



"H" Style  
Halo|Intense



"GB" Style  
3 Circuit

## OPTIC ACCESSORIES (ORDER SEPERATELY)- NO OPTICS FOR ZOOM



Hexcell Louver  
HEX-BK / HEX-WH



Cross Blade Louver  
CB-BK / CB-WH



Barn Doors  
BD-BK / BD-WH



Full Snoot  
FS-BK / FS-WH



Tapered Snoot  
TS-BK / TS-WH



Wallwash Ring  
WW-BK / WW-WH

## Ordering Information:

OVEGA-PD

WATTS : 10W | 20W | 30W

TEMP : 2700K | 3000K | 3500K | 4000K | 5000K

BEAM : 15D | 24D | 38D | 60D | 15-45ZOOM

FINISH : WH | BK | SL

MOUNTING : PENDANT | J | H | L | GB

10w-865lm | 20w-1915lm | 30w-2845lm (Based on 3000k)

